RISEMODE

GAMING MICROPHONE ELITE 08



USER MANUAL

PRODUCT PARAMETERS:

Type: Audio recording live game microphone
Operating voltage/current: DC5V/100 mA
Power supply mode: USB/ Type-C data cable for external power supply
Microphone: 14MM capacitive microphone
Pointing: Heart pointing
Sensitivity:-40dB+3dB
Signal to noise ratio: ≥70dB
Frequency response: 30Hz-20kHz
Sampling frequency: 48kHz-192kHz
Connection mode: USB/TYPE-C
Line length: 1.8m



USE GUIDE


1. Install the microphone support and connect the base of the support to the tube body without tightening the fixing nut. After the late installation of shockproof frame to be tight.



2. Install the blowout preventer net on the shockproof rack, install the shockproof rack on the support pipe rack, and turn clockwise horizontally for 2 to 3 turns until the shockproof rack faces you.




3. Monitor the earphone jack. Plug in the earphone to monitor in real time.



4. Touch the switch to turn on or off the microphone. When the light is on, the microphone works normally; when the light is off, the microphone is off



5.Broadcast the attached USB data line Type-C gauge port into the microphone, and then broadcast the USB-A interface into the USB port of the computer

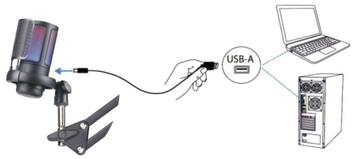

6. Adjust the Angle of the microphone so that the mic core is deeply held towards the sound source, and tighten the screw. We recommend speaking into the microphone at about 15-30 centimeters.



RISE

7. To achieve the best volume effect, we recommend lowering the McPhoenix gain first and then gradually increasing it until you get the desired volume.



Mobile operating


1. Currently compatible mobile phone systems are as follows: Android 6.0 is compatible with H, HarmonyOS 1.0 or higher, and IOS 9.0 or higher.
2. Android: Some smart Android phones with OTG function are supported. Some phones and application software may limit the microphone function (such as ear echo monitoring,audio quality,etc.). This is not caused by the quality of the microphone. Please confirm with your mobile device supplier whether your device supports the USB conversion type-c adapter to use the **OTG function.**
For example, some phones of OPPO and VIVO need to turn on the OTG function to use the microphone.
3. IPhone: support IPhone,you need to purchase the legitimate lightning to USB camera converter 1 accessory on Apple's official website, so as to connect our microphone.

Windows 10 system Settings

1. Set the microphone
After connecting the data cable, insert the USB interface of the computer. Later, the computer will automatically install the required driver, but there may not be a prompt message indicating successful installation The MICROPHONE RGB light will be on, which means the microphone is working. If the RGB indicator does not respond or is off the microphone is silent
1) Right-click the speaker icon in the lower right corner of the screen. Click on "Turn on Sound Settings



2) Click the Sound control panel

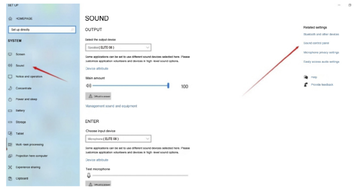


3) Select the "Record" option and select "ELITE 08"as the default device When using the microphone to speak, the microphone's volume indicator icon turns green and jumps; If the indicator icon is gray, restart the computer and reset it in the USB port If "ELITE 08"is still unavailable, contact customer service for technical support.



2. Microphone input volume Settings
1) At the bottom of the microphone, gradually adjust the volume button.
2) Adjust the input volume. Double-click on "ELITE 08" to access the microphone properties and select the "Level" option. Right-click the rab icon under the options, change the "percentage" to "decibels", and drag the volume bar to adjust the input volume



3. Set sound output
In the "Sound" menu, select the device that needs to play the sound. For example, select "ELITE 08", which is the output sound of the microphone headphone hole. We can hear the sound including the voice of ourselves and the voice output by the computer by plugging in the headphone hole of the microphone



Note: (for MAC and Windows)
1. If the computer displays a message indicating that the USB device cannot be identified, restart the computer and connect the microphone to another USB port
2. If no sound is heard, check whether the system voice is muted and whether the microphone volume control is enabled
3. If the microphone recognizes but there is no sound and your computer is Running Windows 10, go to Settings > Privacy & gt;Microphone, and click Allow application access to the microphone to open and then reconnect the microphone.

Apple's MAC operating system

1. Insert the supplied USB data cable into the USB port on the computer.
2.RGB indicator light turns on immediately, which means the microphone is working; If the RGB light is not lit. Tap the mute button, the RGB light will turn on, at this time the microphone is in working state.
3. To select ELITE 08 as the AUDIO input, first, open system preferences.
4. Click System Preferences and choose Sound. The properties page is displayed.
5. Click Input and select ELITE 08 as the AUDIO input device. Drag the volume bar below to adjust the input volume of the microphone.

Precautions (for MAC)
On a MAC, if you use the computer (and speaker) to amplify the sound instead of listening to the microphone, you must use the listening function of the recording software to do so. (Quick Time Player or Audacity), adjust your software Settings, select listen for audio while recording, and click the Record button so that you can hear yourself from your computer speaker as you speak.

When using voice-to-text on your Macbook, select the default dialog and voice software and click "Open" under the dialog window so that the software can recognize your microphone.

If your Mac has USB-C ports only, you will need to purchase an original Apple, USB-C to USB female adapter to connect. Please first plug the USB adapter into your Mac and then connect the microphone cable.

https://www.risezusa.com

RISEMODE

GAMING MICROPHONE ELITE 08



MANUAL DO USUÁRIO

PARÂMETROS DO PRODUTO:

Tipo: microfone de jogo ao vivo para gravação de áudio
Tensão/corrente operacional: DC5V/100 mA
Modo de fonte de alimentação: cabo de dados USB/Tipo C para fonte de energia externa
Microfone: microfone capacitivo de 14mm
Apontando: Coração apontando
Sensibilidade: -40dB+3dB
Relação sinal/ruído: 270dB
Resposta de frequência: 30Hz-20kHz
Frequência de amostragem: 48kHz-192kHz
Modo de conexão: USB/TYPE-C
Comprimento da linha: 1,8 m



GUIA DE USO


1. Instale o suporte do microfone e conecte a base do suporte ao corpo do tubo sem apertar a porca de fixação. Depois do tarde instalação da estrutura à prova de choque para ser apertada.



2. Instale a rede de prevenção no rack à prova de choque, instale o rack à prova de choque no suporte de tubos do microfone e gire no sentido horário horizontalmente por 2 a 3 voltas até que o rack à prova de choque fique voltado para você.




3. Conector para fone de ouvido. Conecte o fone de ouvido para monitorar em tempo real.




4. Toque no botão para ligar ou desligar o microfone. Quando a luz está acesa, o microfone funciona normalmente; quando a luz está apagada, o microfone está desligado



5. Conecte a ponta do cabo USB-C no microfone, em seguida a outra ponta do cabo USB-A conecte na porta USB do seu computador.

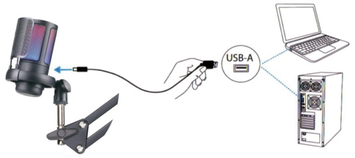

6. Ajuste o ângulo do microfone para que o núcleo do microfone fique profundamente preso em direção à fonte sonora e aperte o parafuso. é recomendado falar no microfone a cerca de 15-30 centímetros.



RISE

7. Para obter o melhor efeito de volume, recomendamos diminuir o Ganho McPhoenix primeiro e depois aumentando gradualmente até obter o volume desejado.




Operação móvel


1. Os sistemas de telefonia móvel atualmente compatíveis são os seguintes: Android 6.0 ou superior, HarmonyOS 1.0 ou superior e IOS 9.0 ou superior.
2. Android: Alguns smartphones Android com função OTG são suportados. Alguns telefones e softwares aplicativos podem limitar a função do microfone (como monitoramento de eco auditivo, qualidade de áudio, etc.). Isto não é causado pelo
qualidade do microfone. Confirme com seu fornecedor de dispositivo móvel se o seu dispositivo suporta o adaptador de conversão USB tipo c para usar a função OTG.
Por exemplo, alguns telefones OPPO e VIVO precisam ligar o OTG função para usar o microfone.
3. IPhone: Suporte Iphone, você precisa adquirir um adaptador legítimo USB no site oficial da Apple, para conectar o nosso microfone.

Configuração no Windows 10


1. Configure o microfone
Após conectar o cabo de dados, insira o cabo USB no computador, em seguida o computador instalará automaticamente o driver necessário, Irá aparecer uma mensagem de prompt indicando instalação bem-sucedida. A luz RGB do MICROFONE estará acesa, o que significa que o microfone está trabalhando. Se o indicador RGB não responder ou estiver desligado o microfone estará em silencio.
1) Clique com o botão direito no ícone do alto-falante no canto inferior direito da tela. Clique em "Ativar configurações de som"




2) Clique no painel de controle de som

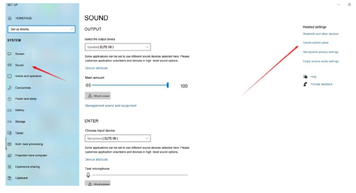


3) Selecione a opção “Gravar” e selecione “ELITE 08” como dispositivo padrão. Ao usar o microfone para falar, o ícone indicador de volume do microfone fica verde e salta; Se o ícone indicador estiver cinza, reinicie o computador e reinicie-o na porta USB. Se o “ELITE 08” ainda estiver indisponível, entre em contato com o atendimento ao cliente para obter suporte técnico.



2. Configurações de volume de entrada do microfone
1) Na parte inferior do microfone, ajuste gradualmente o botão de volume.
2) Ajuste o volume de entrada. Clique duas vezes em “ELITE 08” para acessar o propriedades do microfone e selecione a opção "Nível". Clique com o botão direito no ícone nas opções, altere a “porcentagem” para “decibéis”,e arraste a barra de volume para ajustar o volume de entrada.



3. Defina a saída de som
No menu “Som”, selecione o dispositivo que deseja reproduzir o som. Por exemplo, selecione "ELITE 08", que é o som de saída do orifício do microfone para fone de ouvido. Podemos ouvir o som, incluindo a nossa voz e a saída de voz do computador, conectando o orifício do fone de ouvido do microfone.



Nota: (para MAC e Windows)
1. Se o computador exibir uma mensagem indicando que o dispositivo USB não pode ser identificado, reinicie o computador e conecte o microfone a outra porta USB.
2. Se nenhum som for ouvido, verifique se a voz do sistema está silenciada e se o controle de volume do microfone está ativado.
3. Se o microfone reconhecer, mas não houver som e seu computador estiver executando o Windows 10, vá para Configurações > Privacidade > Microfone e clique em Permitir acesso do aplicativo ao microfone para abrir e reconectar o microfone.

Configuração no MAC OS

1. Insira o cabo de dados USB fornecido na porta USB do computador.
2. A luz indicadora RGB acende imediatamente, o que significa que o microfone está funcionando; Se a luz RGB não estiver acesa. Toque no botão mudo, a luz RGB acenderá, neste momento o microfone está funcionando.
3. Para selecionar ELITE 08 como entrada de ÁUDIO, primeiro abra as preferências do sistema.
4. Clique em Preferências do Sistema e escolha Som. A página de propriedades é exibido.
5. Clique em Entrada e selecione ELITE 08 como dispositivo de entrada de ÁUDIO. Arraste a barra de volume abaixo para ajustar o volume de entrada do microfone.

Precauções (para MAC)
Em um MAC, se você usar o computador (e alto-falante) para amplificar o som em vez de ouvir o microfone, você deve usar a função de escuta do software de gravação para fazer isso. (Quick Time Player ou Audacity), ajuste as configurações do software, selecione ouvir áudio durante a gravação e clique no botão Gravar para que você possa se ouvir no alto-falante do computador enquanto fala.

Ao usar voz para texto em seu Macbook, selecione a caixa de diálogo padrão e o software de voz e clique em “Abrir” na janela de diálogo para que o software possa reconhecer seu microfone.

Se o seu Mac tiver apenas portas USB-C, você precisará adquirir um original
Adaptador fêmea Apple, USB-C para USB para conectar. Primeiro conecte o adaptador USB ao seu Mac e depois conecte o cabo do microfone.

https://www.risezusa.com